

All stainless steel bimetal thermometer

Model A and E

Nominal size 3", 5", 100 mm or 160 mm

Accuracy: Class 1,0 to EN (100 mm and 160 mm)

Grade A (1 %) according ASME (3" and 5")

Features

- Rugged stainless steel construction
- Fast response
- Protection IP65
- Antiparallax Maxivision® dial (model E)
- External zero adjustment (model E)
- Dry or liquid filled
- Silicone damped coil

Ranges

-50 ... 50 °C up to 0 ... 500 °C

-80 ... 120 °F up to 200 ... 1000 °F

Applications

Chemical and petrochemical industry

Machine and apparatus construction


Food and beverage industry

Pulp and paper industry



Technical specification	AM, AE, AI, A3B							EM, EE, EI, E3B				
Dial size	100 mm			160 mm				3" (80 mm)			5" (125 mm)	
Construction	Cylindrical case with bayonet ring							Cylindrical case with crimp ring, hermetically sealed and external adjustment				
Measuring principle	Bimetallic coil											
Range [°C]	0/50 0/60 0/80 0/100 0/120 0/150 0/160 0/200 0/250 0/300 0/400 0/500 10/150 50/300 50/450 100/500 -10/50 -10/110 -20/40 -20/60 -20/160 -20/180 -25/25 -30/50 -30/70 -40/40 -40/60 -40/160 -50/50 Ranges in °F and dual scales on request											
Temperature limits for ranges	< 120 °C			≥ 120 °C and < 290 °C				≥ 290 °C				
Max. process overtemperature	100 % of span			50 % of span				max. 425 °C for continuous service				
Stem												
Diameter	6 mm, 8 mm, ¼" (6,4 mm), 3/8" (9,6 mm)											
Length	63 ... 1000 mm, minimum length depends on range											
Process connection	Plain G ½ A male, G ½ female, ½ NPT male or ½ NPT female G ¾ A male, G ¾ female, ¾ NPT male or ¾ NPT female G 1 A male, G 1 female, 1 NPT male or 1 NPT female, others on request Fixed, adjustable or with swivel nut											
Connection location	Back, lower (not for dial size 3") and every angle (rotatable)											
Material												
Connection	Stainless steel 316Ti (1.4571)											
Stem	Stainless steel 316Ti (1.4571)											
Case/ring	Stainless steel 304 (1.4301), optional 316L (1.4404) for model A											
Window	Instrument glass, optional laminated safety glass or acrylic glass											
Dial	Aluminum, black markings on white background							Aluminum, black markings on white background, antiparallax, Maxivision® scale				
Pointer	Aluminum, black											
Accuracy	Class 1 (dry) and class 2 (liquid filled) according EN 13190							1 % ASME B40.3, Grade A				
Protection according EN 60 529/IEC 529	IP65											
Filling liquids	Silicone, not for lower connection, standard acrylic glass, Maximum range up to 300 °C (ambient temperature maximum 65 °C)											
Weight [kg]												
Connection location	Back	Lower	Every angle	Back	Lower	Every angle	Back	Lower	Every angle	Back	Lower	Every angle
Dry	0,35	0,55	0,55	0,7	0,9	0,9	0,2	---	0,4	0,4	0,6	0,6
Filled	0,6	---	0,8	1,0	---	1,2	0,6	---	0,7	0,7	---	0,9
Accessories, options	Thermowells, dual scale, calibration certification											

General dimensions [mm]

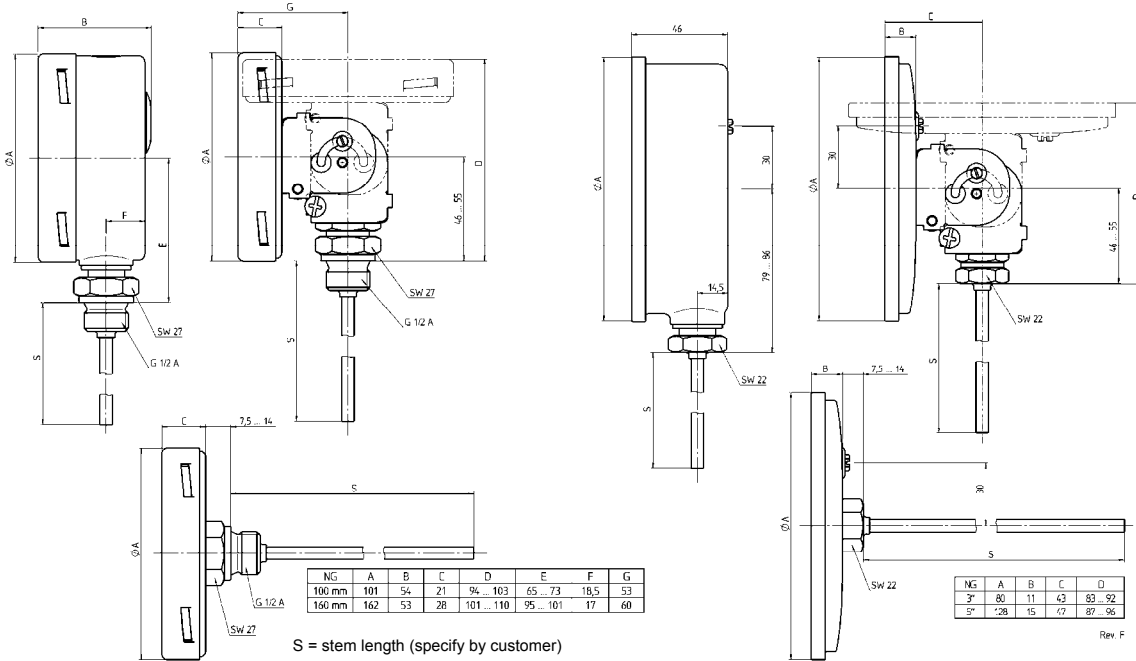

0/ 100	°F
0/ 150 ¹⁾	
0/ 200	
0/ 250	
0/ 300 ¹⁾	
0/ 350	
0/ 500 ¹⁾	
20/ 120 ¹⁾	
30/ 130 ¹⁾	
30/ 240 ¹⁾	
50/ 300	
50/ 400	
50/ 550 ¹⁾	
80/ 180	
100/ 800	
160/ 360	
170/ 270	
200/ 400	
200/ 700 ¹⁾	
200/1000 ¹⁾	
-40/ 120	
-40/ 160	
-20/ 120 ¹⁾	
-80/ 120	
-10/ 100	
¹⁾ minimum stem length 100 mm	

Order information

Size	Type and stem execution	Filling	Process connection	Connection orientation	Stem length	Range	Engineering unit	Options
(100) 100 mm	Metric housing with bayonet ring (IP65)	(L) Liquid filled with silicone max. up to 300 °C (not for lower connection, ambient temperature maximum 65 °C)	(040) Plain	(L) Lower ¹⁾	63 to 1000 mm	0/ 50 ¹⁾	°C	(NH) Tagging wired
(160) 160 mm	(AM) 6 mm		(042) Union outlet ½ NPT male	(R) Back		0/ 60 ¹⁾		(DA) Dial marking
	(AE) 8 mm		(060) Fixed ½ NPT male	(E) Every angle		0/ 80 ¹⁾		(RT) Stepped stem
	(AI) ¼" (6,4 mm)		(061) Fixed G ½ A male			0/ 100		(CS) Dual scale
	(A3B) 3/8" (9,6 mm)		(070) Adjustable union ½ NPT male			0/ 120		(PD) Acrylic glass
			(071) Adjustable union G ½ A male			0/ 150		(SG) Safety glass
			(072) Adjustable union ¾ NPT male			0/ 160		(SH) Red set hand stationary
			(074) Adjustable union ½ NPT female			0/ 200		(YW) 316L (1.4404) housing (not for lower housing and size 3")
			(080) Swivel nut G ½ A male			0/ 250 ¹⁾		
			(081) Swivel nut G ½ female			0/ 300 ¹⁾		
(30) 3" (80 mm)	ANSI housing hermetically sealed (IP65)	(L) Liquid filled with silicone max. up to 300 °C (not for lower connection, ambient temperature maximum 65 °C)	(071) Adjustable union G ½ A male		63 to 1000 mm	0/ 400 ¹⁾	°F see table	
(50) 5" (125 mm)	(EM) 6 mm		(072) Adjustable union ¾ NPT male			0/ 500 ¹⁾		
	(EE) 8 mm		(074) Adjustable union ½ NPT female			10/ 150		
	(EI) ¼" (6,4 mm)		(080) Swivel nut G ½ A male			50/ 300 ¹⁾		
	(E3B) 3/8" (9,6 mm)		(081) Swivel nut G ½ female			50/ 450 ¹⁾		
						100/ 500 ¹⁾		
						-10/ 50 ¹⁾		
						-10/ 110		
						-20/ 40 ¹⁾		
						-20/ 60 ¹⁾		
						-20/ 160		
						-20/ 180		
						-25/ 25 ¹⁾		
						-30/ 50 ¹⁾		
						-30/ 70		
						-30/ 170		
						-40/ 40 ¹⁾		
						-40/ 60		
						-40/ 100		
						-40/ 160		
						-50/ 50		

How to order

Size	Type and stem execution	Filling	Process connection	Connection orientation	Stem length	Range	Engineering unit	Option
50	EE	=	070	E	150	0/200	C	NH

Ashcroft GmbH

Germany
Max-Planck-Straße 1, D-52499 Baesweiler
P.O. Box 11 20, D-52490 Baesweiler
Tel.: +49 (0) 2401 808-0, Fax: +49 (0) 2401 808-125

France
„206“ ZA Le Mandinet Rue des Campanules
F-77185 Lognes
Tel.: +33 (0) 1 60 37 25 30, Fax: +33 (0) 1 60 37 25 39

Website: www.ashcrofteurope.com e-Mail: sales@ashcrofteurope.com

United Kingdom

Unit 5 William James House
Cowley Road, Cambridge CB4 0WX
Tel.: +44 (0) 12 23 39 55 00, Fax: +44 (0) 12 23 39 55 01